

METROPOLE

Features

Thermostatic Shower System Trim

- Solid brass construction
- Temperature-adjust handle for thermostatic valve
- Lever handle assembly for control valve
- Intended for use with Newport Brass rough valve(s) as specified (Required Accessory)

3-1204TR

Also 3-245

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAMPO/cUPC
- IPC
- All applicable US Federal and State material regulations





Colors / Finishes

- 10B: Oil Rubbed Bronze
 15: Polished Nickel
 15S: Satin Nickel PVD
 26: Polished Chrome
- Other: Refer to the Newport Brass catalog for additional color/finish options.

3-1204TR

3-245

Specified Model Model Description Colors | Finishes 3-1204TR Thermostatic Shower System Trim 10B 15S 26 Other 15 3-245 Shower System Control Valve Trim (Escutcheon/Handle) 10B 15 15S 26 Other

Required Accessory					
System Element	Shower Temp. Control	Flow Control Valve Option A		Flow Control Valve Option B***	
Description	Thermostatic	3-Outlet Diverter w/OFF		Single Outlet ON/OFF	
Inlet/Outlet Size	3/4"	1/2" (no share function)	1/2" (w/share function)	1/2"	3/4"
Part Number	1-540	1-701*	1-702**	1-606U	1-607U
Image					

Flow Control Option A: Select ONE (1-701 or 1-702) per system.

Flow Control Option B: Select ONE (1-606U or 1-607U) per each outlet fixture (ie showerhead, handshower, overhead soaker).

Product Specification Add "Color / Finish" suffix to Model number, below.


The Thermostatic Shower System Trim shall be made of solid brass construction. Thermostatic Shower System Trim shall include a faceplate and temperature-adjust handle. Shower System Control Valve Trim(s) (Escutcheon/Handle) shall be ADA compliant when used with specified Shower System Control Valve(s). Thermostatic Shower System Trim shall be Newport Brass Model 3-1204TR/___ and Thermostatic Shower System Valve shall be Newport Brass Model 1-540. Shower System Control Valve Trim (Handle/Escutcheon) shall be 3-245/___ and Shower System Control Valve(s) shall be 1-70___ (1 required) or 1-60___ (one required per outlet fixture).


^{* 1-701} is a diverter valve with NO share function capability between outlets.

^{** 1-702} is a diverter valve with share function capability between primary outlet and each of the other two outlets.

3-1204TR

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

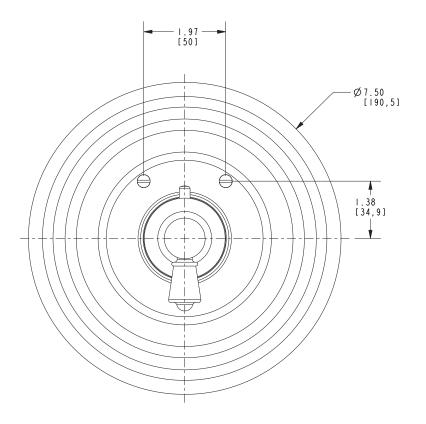

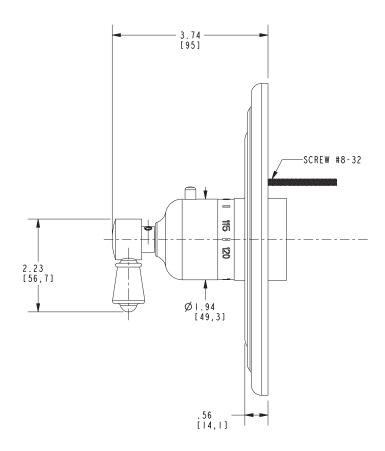

NOTE: Product Dimensions for the Shower System Control Valve Handle Trim (Handle/Escutcheon can be found within the Spec Sheet for that specific part number.

Metropole Thermostatic Shower System Trim **3-1204TR**

