NEWPORT BRASS

JACOBEAN

2470-5432

Features

Two-Handle Kitchen Faucet with Sidespray

- Solid brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valve cartridges
- Swivel spout assembly with integral diverter fitting
- Solid brass pull-out sidespray
- 6.00" (15.2 cm) spout height at outlet
- 9.05" (23.0 cm) spout reach (c-c)
- For 8" (20.3 cm) centers Maximum 20" (50.8 cm)
- ADA Complaint (Handles Only)
- 1.8 GPM (6.8 LPM) Max

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAMPO/cUPC
- NSF/ANSI/CAN 61, SECTION 9
- NSF/ANSI 372
- IPC
- ADA & ICC/ANSI A117.1 (Handle Only)
- Energy Policy Act of 1992
- California Energy Commission
- ASME A112.18.3 (Back Flow)
- All applicable US Federal and State material regulations

Colors / Finishes

- 10B: Oil Rubbed Bronze
- 15: Polished Nickel
- 15S: Satin Nickel PVD
- 26: Polished Chrome
- Other: Refer to the Newport Brass catalog for additional color/finish options.

Specified Model

Model	Description	Colors Finishes
2470-5432	Two-Handle Kitchen Faucet with Sidespray	□ 10B □ 15 □ 15S □ 26 □ Other

Product Specification Add "Color / Finish" suffix to Model number, below.


The Two-Handle Kitchen Faucet with Sidespray shall be made of solid brass construction. Faucet shall incorporate a swivel spout assembly with integral sidespray diverter fitting and feature brass valve bodies with quarter-turn washerless ceramic disc valve cartridges. Faucet shall have a 1.8 gallons (6.8 liters) per minute maximum flow rate. Product shall be for 8" (20.3 cm) centers - Maximum 20" (50.8 cm). Product shall incorporate a 6.00" (15.2 cm) spout height at outlet and a 9.05" (23.0 cm) spout reach (c-c). Faucet shall incorporate cross handles. Two-Handle Kitchen Faucet shall be Newport Brass Model 2470-5432/____





2470-5432

PRODUCT DIMENSIONS (Units are in inches)

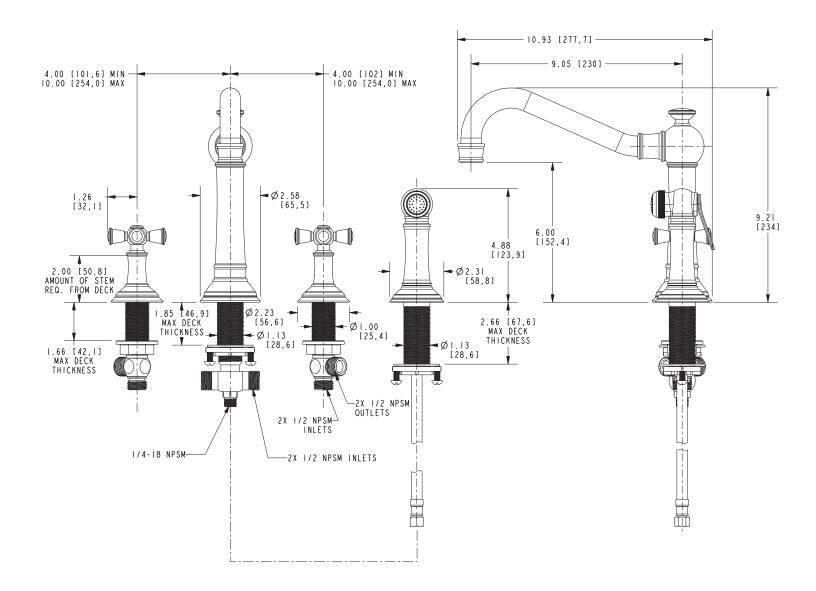

Jacobean Two-Handle Kitchen Faucet 2470-5432



t: 949.417.5207 | www.newportbrass.com ©2022 Brasstech, Inc.

Page 2 of 2 Spec_2470-5432_a_7.22 EN-4536