

Features

Brass Construction
 Euro-motion ceramic disc 40 mm valve cartridge
 12.0 gallons (45 liters) per minute spout maximum flow rate
 3/4" braided hot and cold supply lines (with 1/2" adapters)
 37.22" (94.5 cm) tub spout height at outlet
 8.73" (22.2 cm) tub spout reach (center-center)
 Traditional handshower design of brass construction
 For single hole configurations
 ADA Compliant (Handles Only)
 1.8 GPM (6.8 LPM) Max, Handshower Only

Tub and Handshower Set


2940-4261



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1
 IAMPO/cUPC
 IPC
 ADA & ICC/ANSI A117.1 (Handle Only)
 Energy Policy Act of 1992
 EPA WaterSense
 California Energy Commission
 ASME A112.18.3 (Back Flow)
 All applicable US Federal and State material regulations



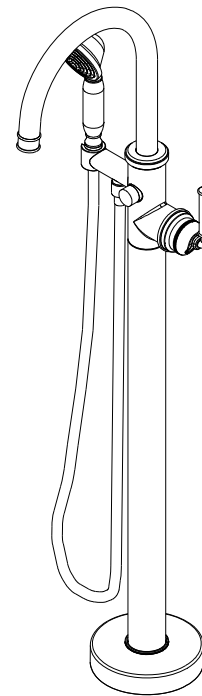


ACCESSORY OPTIONAL	
System Element	Rough valve
Description	Freestanding Tub Fill Rough Kit (Floor Mount)
Inlet/Outlet Size	3/4" NPT and 1/2" direct sweat connections inlets / 3/4" NPT and 1/2" NPT outlets
Part Number	1-339
Image	

2940-4261

PRODUCT DIMENSIONS (Units are in inches)

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

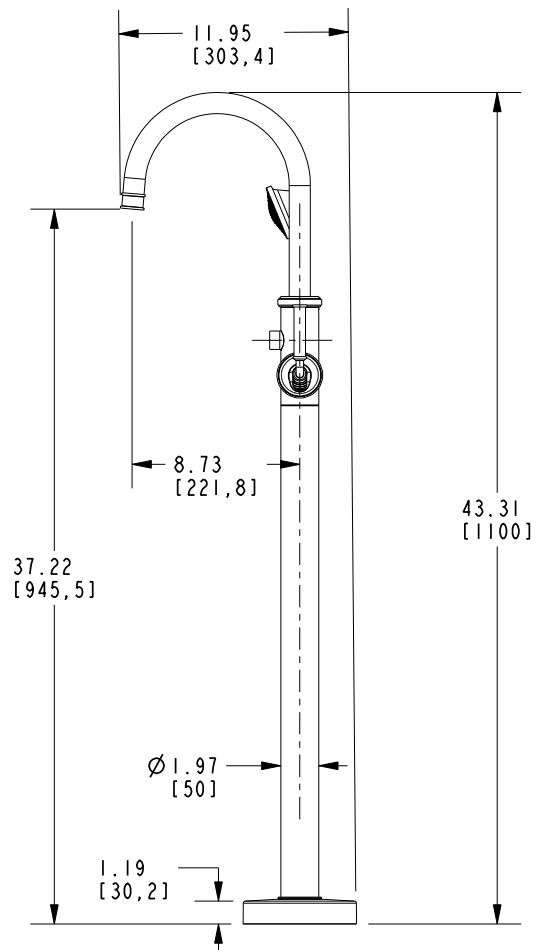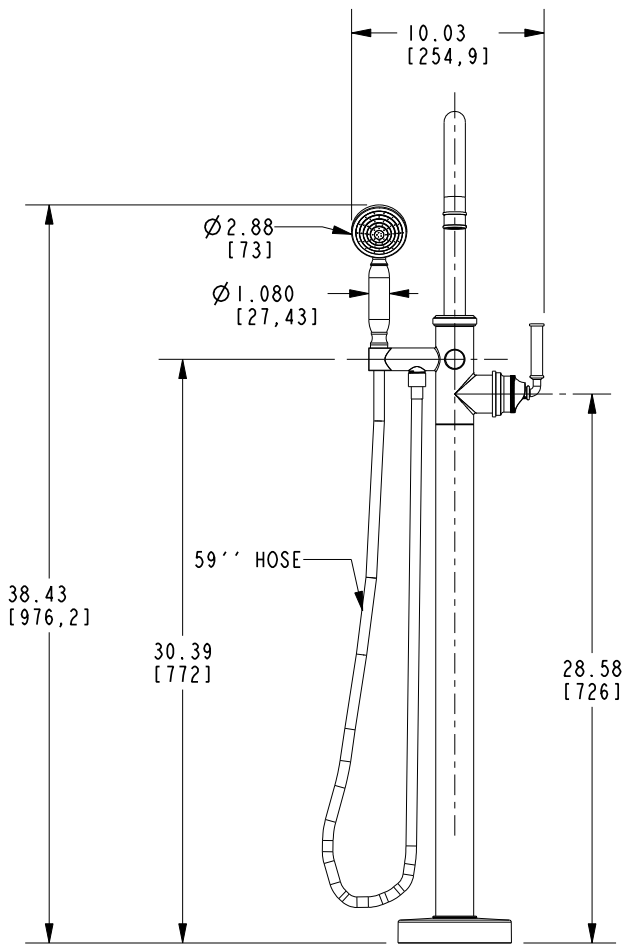

Tub and Handshower Set
2940-4261

Page 2 of 2
EN- 4823
REVA

NEWPORT BRASS
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com
©2024 Brasstech, Inc.